
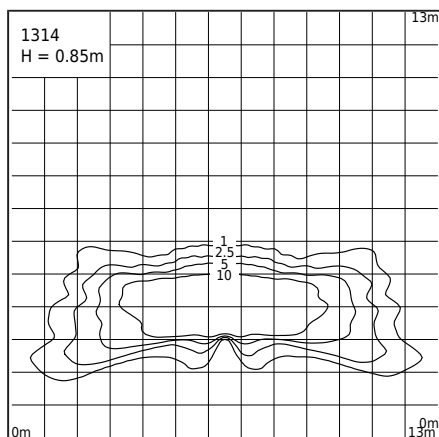
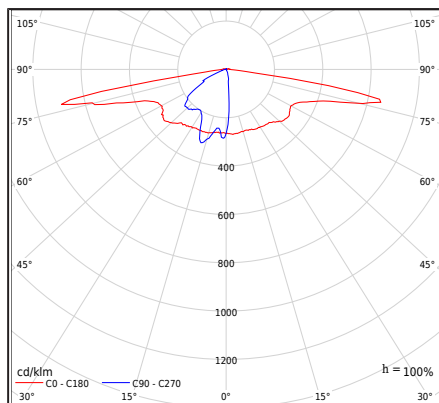


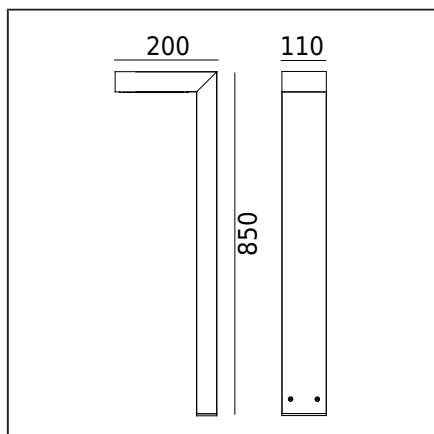

Art	E-nr	Färg	RAL
1314AL	7748670	ALUMINIUM	9006
1314GR	7748671	GRAFIT	7016
1314B	7749529	SVART	9005

Allmän information

Typ armatur	Pollare
Material	Pulverlackerad aluminium
Ljusstyrning	Bakkantsdimmer
Netto / Bruttovikt armatur	4,5kg / 4,85kg
Förpackning mått [cm]	22,3x12,8x87
Drivdon	Philips Xitanium 10W 0,5A 20V TE SC 230V (⚡ Produktblad)
Led modul effekt	5,8W
Armatur effekt	7,7W
Lumen modul	828lm
Lumen ut	697lm
Led modul effekt	142,8lm/W
Armaturens effekt	90,5lm/W
ULOR	1%
Färgtemperatur	3000K
Färgbeständighet (McAdam ellipse)	SDCM3
Färgtolkningsindex (CRI/Ra)	80
Nominell livstid L70/B50 vid 25°C	>109 000h
LED-fotobiologiskt hot	RG0 or RG1
Energieffektivitetsindex (EEL)	AdE / ⚡ EPREL
Effektfaktor	PF > 0,95
THD-faktor	< 20%
Ta nominel:	+25°C
Maximal omgivningstemperatur	+40°C
Inrush current	3,36A/36μs

Filer som kan laddas ned

Photometric LDT files, Photometric IES files, Manualer, BIM Revit, BIM ArchiCAD